PREMIER COLLECTIONS

25 INCH DIAMOND

assembly instructions

Step 1:
Unroll Kite.

Step 2:
Identify and organize struts.

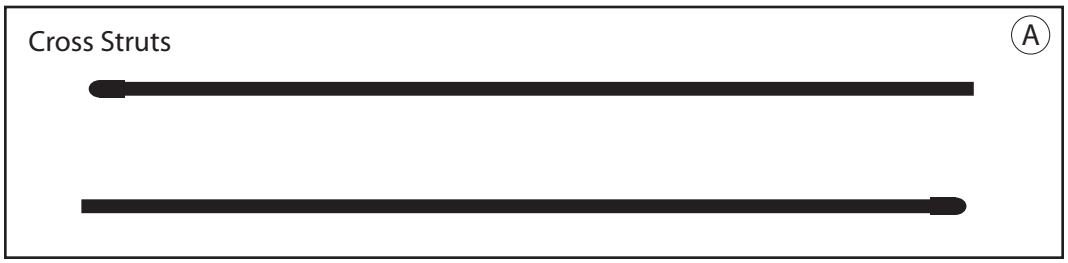

Step 3:
Insert the Cross Struts into the Cross Strut Pockets for both sides of the kite.

Step 4:
Slide the Cross Struts into the Plastic Center Molding.

Step 5:
Attach the flying line to the tow point on the bridle on the front of the kite.

Your kite is now ready to fly!

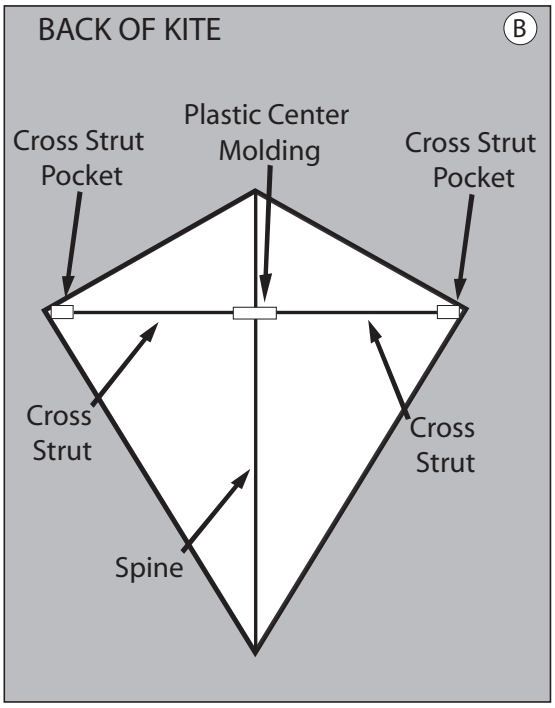

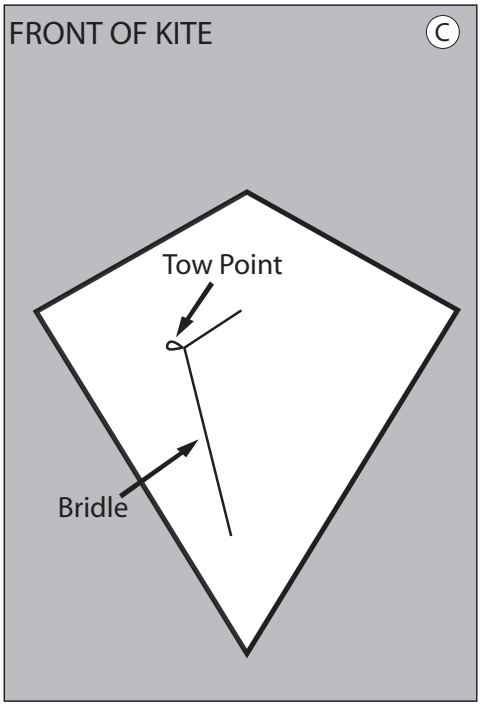

FLIGHT INSTRUCTIONS:

-Attach flying line to Tow Loop.
-Have a friend stand about 75 ft. downwind from you and hold the kite with its Leading Edge pointed towards the sky.
-As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
-Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 20 LB TEST LINE

OPTIMUM WIND CONDITIONS FOR 25 INCH DIAMOND

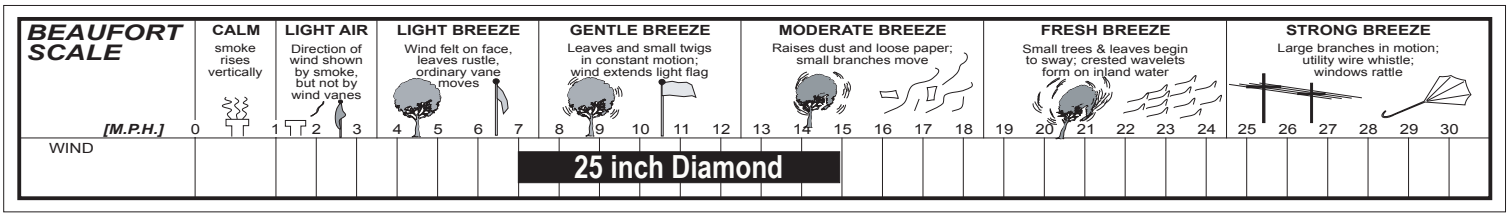

Note: Wind conditions aloft may vary considerably from those found near ground level.