
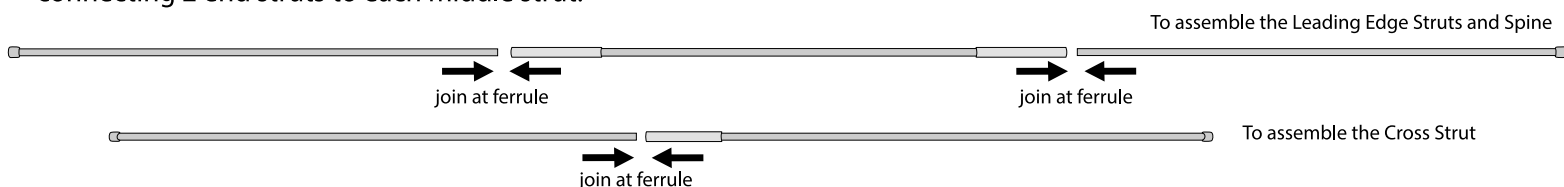



Unroll kite and lay out flat facedown.

Your frame consists of 11 Strut pieces: 2 pieces make up the Cross Strut. 9 pieces make up the Leading Edge and Spine Assemblies (3 Middle Struts, 6 End Struts.) Assemble the Leading Edge Struts and Spine by connecting 2 end struts to each middle strut.

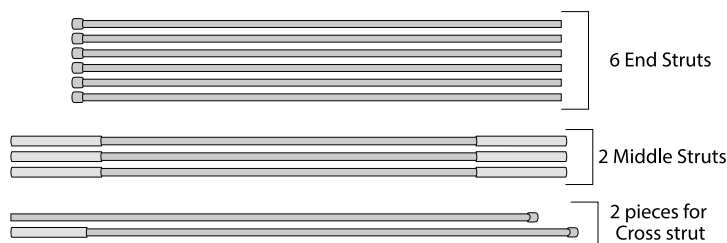

Insert assembled Spine Rod into Spine Sleeve.

Insert Leading Edge Struts into Leading Edge Sleeve Opening. Push the assembled Leading Edge Struts all the way to the Wing Tips. *Tip: Some people find it easier to install a small amount of tape on the ferrules to help hold the Strut assembly together while inserting it.*

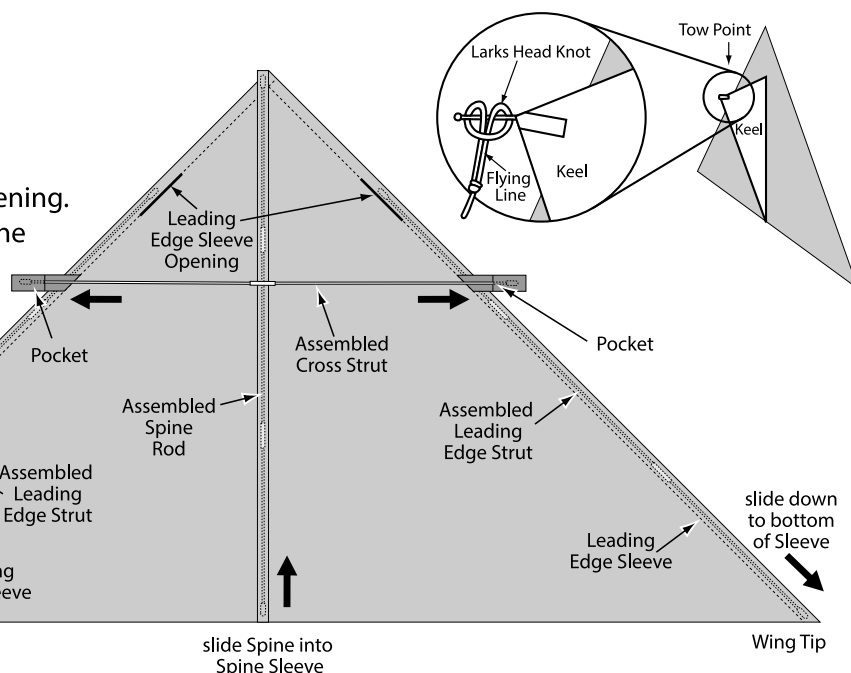

Insert Cross Strut into Pockets.

Attach Line to Tow Point,
and your 19ft. Delta is now
ready to fly!

FLIGHT INSTRUCTIONS:

- Tie flying line to Tow Loop.
- Have a friend stand about 75 ft. downwind from you and hold the kite with its head pointed towards the sky.
- As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
- Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 500 LB TEST LINE

OPTIMUM WIND CONDITIONS FOR 19ft. DELTA

BEAUFORT SCALE		CALM smoke rises vertically		LIGHT AIR Direction of wind shown by smoke, but not by wind vane		LIGHT BREEZE Wind felt on face, leaves rustle, ordinary vane moves		GENTLE BREEZE Leaves and small twigs in constant motion; wind extends light flag		MODERATE BREEZE Raises dust and loose paper; small branches move		FRESH BREEZE Small trees & leaves begin to sway; crested wavelets form on inland water		STRONG BREEZE Large branches in motion; utility wire whistle; windows rattle																																	
WIND [M.P.H.]	0		1		2		3		4		5		6		7	8		9	10		11		12	13		14		15	16		17	18	19		20		21		22	23	24	25	26	27	28	29	30
19ft. DELTA																																															

Note: Wind conditions aloft may vary considerably from those found near ground level.