PREMIER COLLECTIONS

FLO TAIL DELTA

assembly instructions

Step 1:
Unroll Kite.

Step 2:
Identify and organize Struts.

Step 3:
Insert the Spine into the Spine Pockets and close the velco at the bottom of the Spine Pocket.

Step 4:
Make sure the Leading Edge Struts are slid all the way down the Leading Edge Sleeves.

Step 5:
Insert the Cross Strut into the Cross Strut Fittings.

Step 6:
Attach the flying line to the bridle loop on the front of the kite.

Your kite is now ready to fly!

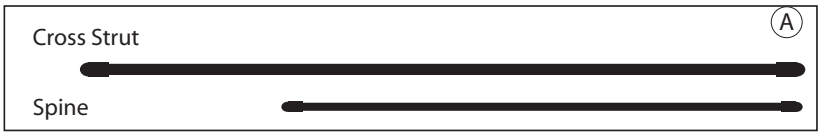

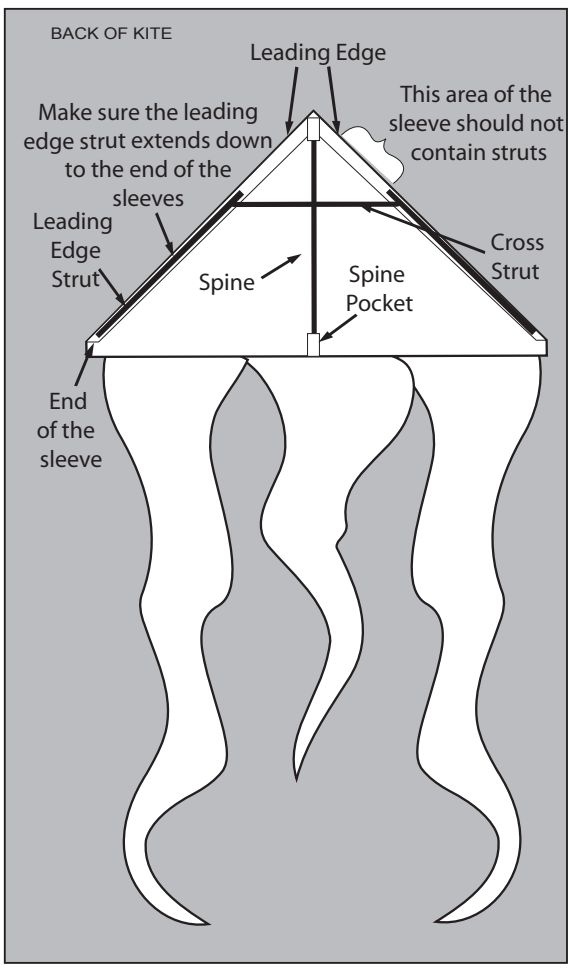

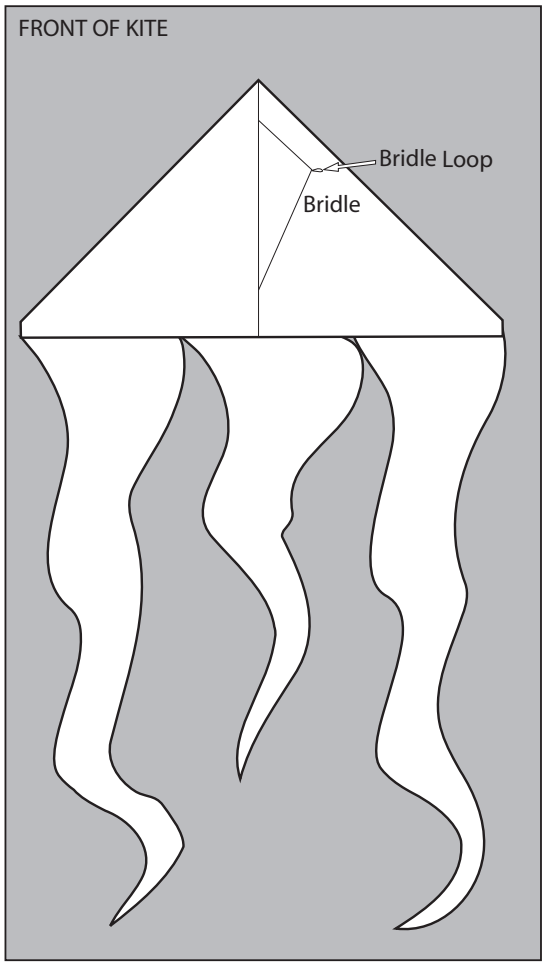

FLIGHT INSTRUCTIONS:

-Attach flying line to Tow Loop.
-Have a friend stand about 75 ft. downwind from you and hold the kite with its Leading Edge pointed towards the sky.
-As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
-Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 50 LB TEST LINE

OPTIMUM WIND CONDITIONS FOR FLO TAIL DELTA

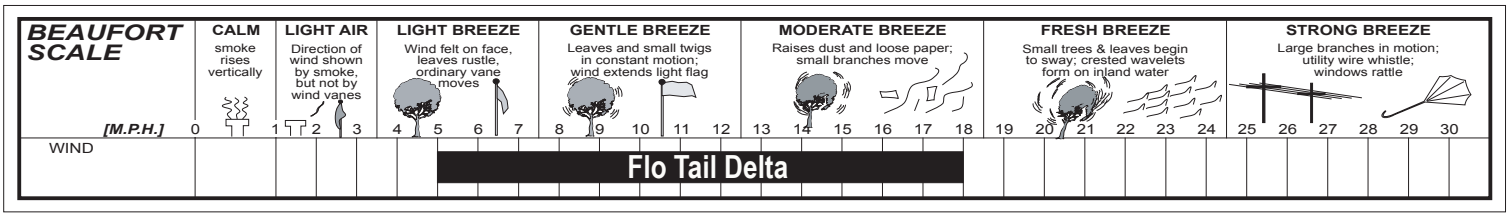

Note: Wind conditions aloft may vary considerably from those found near ground level.